


RAW

CRF90 - LED Flood Light

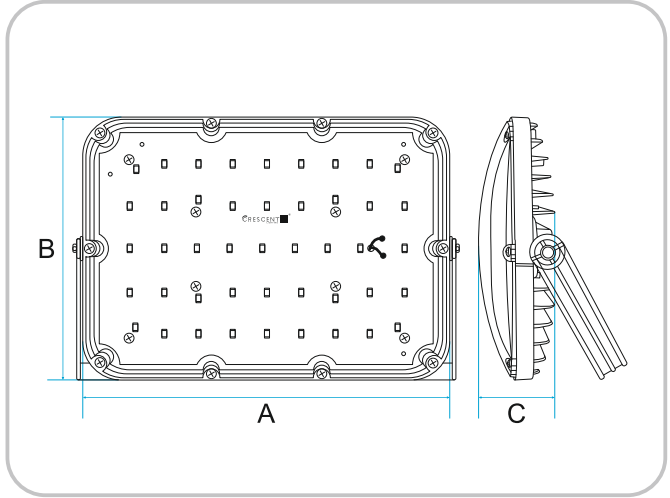

Product Details

Lighting Performance

Variants	15W 30W 50W
Lumen Output	1800 3600 6000
Luminous Flux (Lm)	120 Lm/ Watt
Rated Voltage (V)	240V, 50Hz
No. of LEDs	24 45 96

LED Specification

Color Temperature	3K 4K 6K RD GR BL
Single LED Lumen	140Lm - 150Lm
Life with Lm80 Criteria	50000 Hrs.
CRI	≥ 80
Beam Angle	120°

Driver Specification

BIS Registration	Yes
Surge Protection	Up-to 6KV
Short Circuit Protection	Yes
Open Circuit Protection	Yes
Power Factor	>0.95
Country of Manufacturing	India

Qualification & Warranty

IS 10322 / Part - 5



R - 71012300
www.bis.gov.in



Construction

Optical Cover	Polycarbonate
Product Construction	Polycarbonate
Housing / Body Material	Polycarbonate
Heat Sink Material	Polycarbonate
Product Color	Grey
Patent Design No.	378310-001

Environment & Life-span

IP Rating	IP66
Net Weight in Gram	380 540 820
Standard Packing	30 30 10

Dimensions

Product Dimension (mm) (L×W×H)	Wattages	A	B	C
	15W	180	140	45
	30W	240	190	45
	50W	330	220	60